

SECRET
SECURITY INFORMATION

20 February 1952

SUMMARY

RS-6 TRANSMITTER

(Period 2 to 20 February 1952)

I. Oscillator coil constructed and installed in transmitter. Test run indicates greater outputs on high bands with resulting increase of power output from P.A. Mechanical linkage and cam assembly installed on oscillator condenser and operation checked. Greater rigidity of chassis and shield plate indicated necessary if method is to be used as production item. Change of P.A. stage and oscillator stage show improvement in low output portions of range; i.e. 3.0 mc., 9.0 mc. (x3) and 16.0 mc. Further investigation of chokes undertaken but not complete this date. Resistance values in oscillator screen and plate changed to allow correct voltages with 375 v. supply.

II. A single coil, tapped for high band, and slugged with G-1 material, was constructed and installed in P.A. stage. Due to physical and mechanical limitations, i.e., brass collector ring at plate end of coil, etc., coil Q in neighborhood of 85 instead of 185, and results of tests indicate unsatisfactory operation. It is felt that this method, although it possesses certain physical advantages with respect to occupied space in transmitter, does not have acceptable performance, as compared to that of a dual coil system such as previously investigated. Therefore, investigation and further improvement of dual system has been undertaken. Electrically, the dual system is quite satisfactory from output and efficiency standpoint, but requires certain mechanical refinements before final judgment or evaluation is made.

In view of the above, the Mechanical Section is undertaking to reduce physical size of assembly, along with installation of gear linkage between coils so as to incorporate single knob drive or control of both coils with respect to antenna sliding tap system. The outcome of this unit when completed by Mechanical Section, should be a finished product operating satisfactorily from both mechanical and electrical standpoints.

III. Conclusion: With oscillator stage modifications as explained above, along with improvements and modifications of P.A. stage as described, the overall performance of the RS-6 should be within an acceptable range.

50X1

**SECRET**
SECURITY INFORMATION

Open Coil type -

35 uF MIN

3 uC C = 200 h = 14.8 uH

7 uC C = 35 h = 14.8 uH

7 uC C = 200 h = 2.62

16.5 uC C = 35 h = 2.62 uH

~~@ 2.62 uH diam = 5/8 h = 1/8 18 T/PIN #22 spaced wire diam.~~

~~@ 14.8 uH diam = 1" h = 1" 3.2 T/IN #27 close wire diam.~~

slug type.

1 1/4

OC - HP3 PLATE TANKS

18 TURNS #22 5/8 FORM

10.5 TURNS #22 5/8 FORM - GIC SLUG 3/8 diam

9 1/4 TURNS #22 1" FORM COIL LENGTH = 7/16

LB

24 TURNS #22 1" FORM

FINAL PLATE TANKS.

HP3 = 23 TURNS - #22 BARE PITCH 22/IN 8 @ 5 SLUGS -
COIL DIAM = 1" h = 17.2 uH Q = 200

HP3 - 9 1/2 TURNS #22 BARE PITCH 22/IN NO SLUGS -
h = 2.55 uH Q = 200

9:10

I_{tot}	I_p	E_g	E_a
74	58	6	74

74V

RTL6 - MODIFIED TANK 3-31-5v

SLUG LOADED HB TANK L = 1712 uh = 23T #26
 HB TANK L = 2.55 uh 10T
 PARALLEL COMB HB L = 2.3 uh.

$Z_T = 2520$ $\left(\frac{N_T}{N_a}\right) = \sqrt{\frac{2520}{70}} = \sqrt{36} = 6 = \frac{22}{N_a}$
 $Z_a = 70$

$N_T = 22$ $N_a = \frac{22}{6} = 3.65 \text{ TAP} = 70 \Omega$
 $N_a = ?$

$4.3 = \frac{22}{N_a}$; $N_a = \frac{22}{4.3} = 5.12 = \text{TAP} = 150 \Omega$

$3 = \frac{22}{N_a}$; $N_a = \frac{22}{3} = 7.35 = \text{TAP} = 300 \Omega$

$2.5 = \frac{22}{N_a}$; $N_a = \frac{22}{2.5} = 8.8 = \text{TAP} = 600$

$1.875 = \frac{22}{N_a}$; $N_a = \frac{22}{1.875} = 11.75 = \text{TAP} = 1200$

$4.82 = \frac{10}{N_a}$; $N_a = \frac{10}{4.82} = 2.07 \text{ Tap} = 70$

~~$4.07 = \frac{10}{N_a}$; $N_a = \frac{10}{4.07} = 2.45 \text{ Tap} = 150$~~

~~$2.79 = \frac{10}{N_a}$; $N_a = \frac{10}{2.79} = 3.6 \text{ Tap} = 300$~~

~~$2.41 = \frac{10}{N_a}$; $N_a = \frac{10}{2.41} = 4.15 = \text{Tap} = 600$~~

~~$1.77 = \frac{10}{N_a}$; $N_a = \frac{10}{1.77} = 5.65 \text{ Tap} = 1200$~~

RTG. ORIG TANK

3-31-57

LB COIL

L mh = 17.2

30T

TAP FROM GND

1	1.18	= 70	5
2	2.0	= 150	7
3	3.5	= 300	10
4	4.7	= 600	12
5	7.4	= 1200	16

HB COIL

L mh

2.3 (2.58)

13.25

TAP FROM GND

1	.275	= 70	2.75
2	.382	= 150	3.25
3	.54	= 300	4.75
4	.72	= 600	5.50
5	1.08	= 1200	7.50

$$\frac{N_T}{N_a} = \sqrt{\frac{Z_T}{Z_a}}$$

$$\left(\frac{N_T}{N_a}\right)^2 = \frac{Z_T}{Z_a}$$

$$N_T = 30$$

$$N_a = 5$$

$$\left(\frac{30}{5}\right)^2 = \frac{Z_T}{70} = 36 = \frac{Z_T}{70} \quad Z_T = 36 \cdot 70 = \underline{2520}$$

$$Z_a = 70$$

$$Z_T = ?$$

$$\left(\frac{30}{7}\right)^2 = \frac{Z_T}{150} = 4.3^2 \cdot 150 = Z_T = \underline{2760}$$

$$\left(\frac{30}{10}\right)^2 = \frac{Z_T}{300} = 9 \cdot 300 = Z_T = \underline{2700}$$

$$\left(\frac{30}{12}\right)^2 = \frac{Z_T}{600} = 2.5^2 \cdot 600 = Z_T = \underline{3750}$$

$$\left(\frac{30}{16}\right)^2 = \frac{Z_T}{1200} = 1.875^2 \cdot 1200 = Z_T = \underline{4210}$$

$$\left(\frac{13.25}{2.75}\right)^2 = \frac{Z_T}{70} \quad Z_T = 1625$$

$$\left(\frac{13.25}{3.25}\right)^2 = \frac{Z_T}{150} \quad Z_T = 2500$$

$$\left(\frac{13.25}{4.75}\right)^2 = \frac{Z_T}{300} \quad Z_T = 2340$$

$$\left(\frac{13.25}{5.5}\right)^2 = \frac{Z_T}{600} \quad Z_T = 3420$$

$$\left(\frac{13.25}{7.5}\right)^2 = \frac{Z_T}{1200} \quad Z_T = 3760$$

HB TOROID : 2.85 μ h. Q = 180


fm
mm

ORIG OSC HB 2.35 μ h Q = 65


ORIG OSC HB TAP = 10.35 μ h Q = 95

ORIG OSC HB TAP = 16.1 Q = 100


OSC TAP & HB TOROID = 13.15 Q = 105

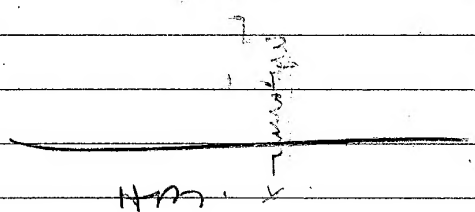

HB TOROID COIL - 19 TURNS ON P.T COP 1/2 dia
 L = 2.35 μ h Q = 170 3/16 THICK
 HB - 7/16" diam 26 TURNS spaced .186 HOLE
 wire diam slugged
 L = 14.1 μ h Q = 150 #30 wire enamel with 91C
 total L = 16.1 Q = 150 .375 diam
 3/4 long

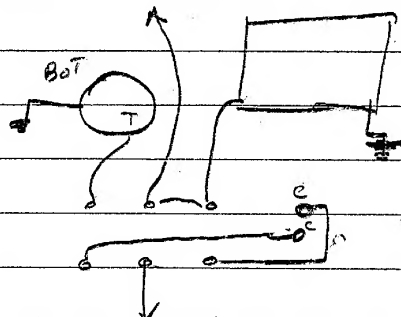

70-150-300-600-1200



STAT

ORIGINAL RS-6 PLATE TANK ON QMETER 3-25-52

L = 17.2 mh Q = 175
 @ 3 mc Q = 190 C = 155
 @ 6.5 mc Q = 215 C = 30


L = 2.55 mh Q = 160

@ 7 mc Q = 150 C = 205
 @ 17.25 mc Q = 190 C = 30

BOTH COLLS IN PARALLEL.



L = 2.3 mh Q = 160
 @ 7 mc Q = 150 C = 225
 @ 18.75 Q = 180 C = 30

HB COIL 5/8 OD X 1/4 DITCH 18/IN
 COIL LENGTH = 1" = 18 TURNS #22 BARE

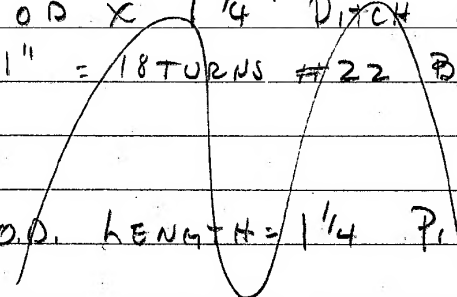

HB COIL 1" O.D. LENGTH = 1/4 PITCH 22/IN

COIL LENGTH = 1" = _____ TURNS # _____



H-3-57

$k = 2.3 \mu h.$

$8.5 T$

$Z = QX$

Z				
4.82	1625	70	Q VARISS	16 TO 6.85
4.07	2500	150	"	24.8 TO 10.5
2.79	2340	300	"	23.2 TO 9.85
2.41	3420	600	"	34 TO 14.5
1.77	3760	1200	"	37 TO 15.8

$X_h @ 7mc = 101$

$X_h @ 16.5mc = 238$

USING Z ABOVE

$\frac{NT}{Na} = \sqrt{\frac{ZT}{Za}}$

$Na = \frac{NT}{\left(\frac{ZT}{Za}\right)^{1/2}}$

$Na = \frac{8.52}{4.82} = 1.76 \quad (1.75)$

$Na = \frac{8.5}{4.07} = 2.08 \quad (2)$

$Na = \frac{8.579}{2.79} = 3.04 \quad (3)$

$Na = \frac{8.511}{2.41} = 3.52 \quad (3.5)$

$Na = \frac{8.51}{1.77} = 4.8 \quad (5)$

$\frac{9}{4.82} = 1.87 \quad (1.75)$

USE

STAT

$\frac{9}{4.07} = 2.2 \quad (2.25)$

$\frac{9}{2.79} = 3.2 \quad (3.25)$

$\frac{9}{2.41} = 3.72 \quad (3.75)$

4-3-52

X VARIES 100 TO 240 OR 2.4 TO 1

LET Q VARY FROM 12 TO 5 OR 2.4 TO 1

THEN $Z = 100 \times 12 = 1200 \Omega$
 $\phi Z = 240 \times 5 = 1200 \Omega$

LET Q VARY 2.4 TO 1 USING Q 24 TO 10

THEN $Z = 100 \times 24 = 2400$
 $\phi Z = 240 \times 10 = 2400$

$N_a = \frac{NT}{\sqrt{\frac{Z_T}{Z_a}}}$ $NT = 8.5$
 $Z_T = 2400$
 $Z_a = 70 \text{ TO } 1200$
 $N_a = ?$

WHEN $Z_a = 70$, $\sqrt{\frac{2400}{70}} = \sqrt{34.3} = 5.86$	Z_a	TAP
$N_a = \frac{8.5}{5.86} = 1.45$	70	1.45 (1.5)
$\sqrt{\frac{2400}{150}} = \sqrt{16} = 4$	150	2.12 (2)
$N_a = \frac{8.5}{4.7} = 2.12$	300	3.0 (3)
	600	4.25 (4.25)
	1200	6.0 (6.00)

$\sqrt{\frac{2400}{300}} = \sqrt{8} = 2.83$	9 TURNS	1.5
$\frac{8.5}{2.83} = 3$		2
	eff = $0.4 \times \phi$	3
		5

$\sqrt{\frac{2400}{600}} = \sqrt{4} = 2$	
$\frac{8.5}{2} = 4.25$	
$\sqrt{\frac{2400}{1200}} = \sqrt{2} = 1.414$	
$\frac{8.5}{1.414} = 6$	

NOT AS GOOD
 RESULTS AS WALL
 AS PULSED READINGS

RS-6 TRANSMITTER ORIGINAL OUT OF CASE 3-)-5
 PA: $E_p = 400$ $E_{sg} = 212$ 6A65 OSC: $E_p = 200$ $E_{sg} = 750$ (.3 Wd. os)


f	I _{total}	I _p	E _g	E _a	P _o	Eff	P _i
3.0 I	66	52	20	84	11.8	57.	20.8
6.0 I	71	55	20	92	14.1	64.	22.0
6.0 II	70	55	20	94	14.7	61.4	22.0
7.0 I	69	52	20	91	13.8	66.3	20.8
7.0 I *	77	63	—	24	0.96	3.8	25.0
9.0 I	74	57	3	77	9.9	43.5	22.8
9.0 II	75	59	1.5	75	9.4	39.8	23.6
9.0 III	75	59	—	56	5.2 ✓	22.0	23.6
11.0 II	74	58	2.5	78	10.1	43.0	23.2
16.0 II	75	59	2	79	10.4	44.0	23.6
16.5 III	75	60	—	65	7.1 ✓	29.0	24.4

SAME AS ABOVE EXCEPT WITH 6BC5 IN OSC

3.0 I	70	53	22	86	12.3	58	21.2
6.0 I	72	57	22.5	94	14.7	64.5	22.8
6.0 II	71	55	22.5	94	14.7	69.0	22.0
7.0 I	68	52	25	92	14.1	68.0	20.8
7.0 I *	78	63	—	26	1.12	4.45	25.2
9.0 I	74	57	6	78	10.1	44.4	22.8
9.0 II	75	58	2.5	77	9.9	42.8	23.2
9.0 III	76	60	—	60	6.0 ✓	24.6	24.0
11.0 II	75	58	4	79	10.4	45.0	23.2
16.0 II	76	59	3	80	10.65	46.0	23.6
16.5 III	73	62	—	71	8.4 ✓	33.8	24.8

* DOES NOT QUITE RESONATE

STAT

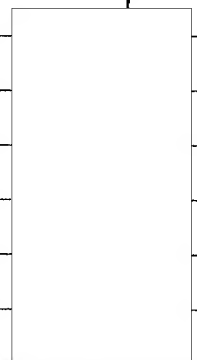

OUT OF CASE
RT6 ORIG. 3-18-52
OSC = 6BC5

f	I _{p total}	I _p	E _g	E _a	P _o	Eff	P _i
3.0 I	69	53	23	88	12.9	61	21.2
6.0 I	72	57	26	95	15.0	66	22.8
6.0 II	71	55	23	96	15.35	70	22.0
7.0 I	70	54	19	93	14.4	66.8	21.6
7.0 I	74	58	18	80	10.7	46.1	23.2
8.0 I	74	57	18	83	11.5	50.5	22.8
8.0 II	74	57	12	81	10.9	48	22.8
9.0 I	74	57	18.5	84	11.75	51.5	22.8
9.0 II	74	57	14	84	11.75	51.5	22.8
9.0 III	76	59	5	79	10.4 ✓	44.0	23.6
11.0 II	74	57	12	86	12.3	54.0	22.8
14.0 II	74	58	11	86	12.3	53.0	23.2
16.0 II	76	60	5	84	11.75	49.0	24.0
16.0 III	77	61	2	80	10.7 ✓	44.0	24.4

STAT

NOTE ORIG OSC COIL HB PORTION CHANGED TO A TOROID TYPE FOR HIGHER Q.

ORIG.	MODIFIED TOROID
LB 3 mc Q=125	—
7 mc Q=150	
HB 7 mc Q=70	HB 7 mc 175
16 mc Q=65	16 mc 110

RS-6-ORIG-WITH 6BC5
AND TDR010 HB OSC
- IN CASE -

(X)


3-26-52

$E_b = 400V$

f	I_{tot}	I_p	E_a	$P_i Total$	P_o	$P_i plate$	Eff	E_g
3.0 I*	74	58	61	29.0	6.2	23.2	26.7*	-
6.0 I	70	55	92	28.0	14.1	22.0	64.2	26
6.0 II	70	55	92	28.0	14.1	22.0	64.2	20
7.0 I	70	55	92	28.0	14.1	22.0	64.2	25
7.0 I	74	59	75	29.6	9.4	23.6	40.5	15
8.0 I	72	58	78	28.8	10.1	23.2	43.5	15
8.0 II	72	57	76	28.8	9.62	22.8	42.25	11
9.5 III	76	61	68	30.4	7.7	24.4	32.1	4
9.0 I	72	57	80	28.8	10.67	22.8	47.0	16
9.0 II	72	57	80	28.8	10.67	22.8	47.0	13
9.0 III	75	59	75	30.0	9.4	23.6	40.0	3
11 II	72	57	82	28.8	11.2	22.8	49.1	11
10.5 III	74	56	79	29.0	9.9	22.4	44.1	6.5
14 II	72	57	82	28.8	11.2	22.8	49.1	10.5
16 II	75	59	80	30.0	10.67	23.6	45.25	7.0
16 III	76	60	74	30.4	9.12	24.00	38.0	1.6

* DOES NOT QUITE TUNE TO FREQ.

⊙ WEAIG XTAL (4000 KC)



STAT

RS-6-EXP.

3-22-52

2E26 Ep=350 Esg=185

6B25 Ep=270 Esg=145


f	I _{total}	I _H	E _s	E _a	P _o	Eff	P _i
3.0 I	64	50	30+	82	11.2	64.4	17.5
6.0 I	61	47	25	82	11.2	68.5	16.4
6.0 II	62	48	17	82	11.2	67.0	16.8
7.0 I	66	52	30+	90	13.5	74.2	18.2
7.0 I *	71	58	30+	74	19.12	48.0	20.3
7.0 I ⊙	71	58	3	62	6.4	31.5	20.3
7.5 III	71	58	3	62	6.4	31.5	20.3
8.0 I	66	52	23	71	8.4	46.2	18.2
8.0 II	67	54	14	70	8.17	43.2	18.9
9.0 I	66	52	23	74	9.12	50.0	18.2
9.0 II	67	54	16	73	8.9	47.0	18.9
9.0 III	66	53	7	68	7.7	41.6	18.5
11.0 II	64	50	17	75	9.4	53.6	17.5
14.0 II	64	50	14	76	9.63	55.0	17.5
16.0 I	65	51	10	74	9.12	51.1	17.8
16.5 III	67	54	4	70	8.17	43.2	18.9
WITH MINIMAX COIL IN HB PA TANK							
11 II	60	46	15	82	11.2	69.5	16.1

ABOVE TAKEN WITH TOROID HB OSC (1 TAP)

COIL RANGE 7-16.5 MC 2.36 mh. Q=170

@ 7. MC Q=170

@ 16 MC Q=120

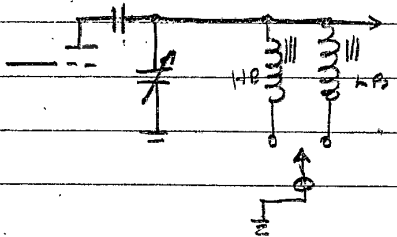

* READING WITH HB OSC @ HB TANK

⊙ DOES NOT QUITE RESONATE W/ HB OSC W/ HP

STAT

RS-6 EXP.

73-22-52

266 Ep 350 ESG 185

6BC5 Ep=270 ESC 145

f	I _{total}	I _p	E _g	E _a	P _o	Eff	P _i	
3.0 I	63	49	30+	84	11.75	68.5	17.15	
6.0 I	61	48	27	82	11.2	66.8	16.8	
6.0 II	63	49	18	82	11.2	65.5	17.15	
7.0 I *	67	54	4	79	10.4	55.0	18.9	
7.0 I ⊙	65	52	30+	88	12.9	71.0	18.2	
7.0 I	69	55	30+	87	8.4	43.6	19.25	
7.0 I	67	54	4	79	10.4	55.0	18.9	
7.5 III	70	56	7	66	7.25	37.0	19.6	
8.0 I	66	53	30+	74	9.15	49.5	18.5	
8.0 II	67	53	24	72	8.65	46.8	18.5	
9.0 I	65	51	30+	76	9.6	54.0	17.8	
9.0 II	65	52	125	74	9.15	50.25	18.2	
9.0 III	66	53	10	70	8.2	44.1	18.55	
11.0 II *	75	62	—	56	5.24	19.75	20.65	
11.0 II	62	49	18	74	9.15	53.4	17.15	
14.0 II	64	50	14	76	9.6	54.9	17.5	
16.0 I *	DOES NOT TUNE DUE TO EXCESSIVE							
16.0 III *	"L" IN HB OSC COIL.							

ABOVE TAKEN USING 3 TOROIDS IN OSC COIL
 ASSY. (2 TAPS)

* OSC NOT QUITE AT RESONANCE DUE TO COIL BEING
 A BIT TOO HIGH IN L
 ○ USING MB OSC AND HB PA

□ REMOVE 1 TURN FROM HB OSC COIL

STAT

5763 PA RS 6 TRANSMITTER TAPPED PATANK 3-10-57
 PA $E_p = 300$ $E_{SG} = 255$ OSC: $E_p = 200$ $E_{SG} = 150$

F	I_{TOTAL}	I_p	E_g	E_a	P_o	Eff	P_i
3.0I	45	30	29	60.5	6.1	68	9.0
6.0I	45	30	28	62	6.4	71.1	9.0
6.0II	44	28	20	61	6.2	74	8.4
7.0I	46	32	30+	65	7.05	73.5	9.6
9.0I	48	35	24	48	3.84	37.6	10.5
9.0I	48	34	22	52	4.5	44.1	10.2
9.0II	47	34	20	50	4.8	47	10.2
9.0III	52	36	7	48	3.84	35.6	10.8
11.0II	46	32	18	54	4.88	50.8	9.6
11.0II	47	33	12	52	4.5	45.5	9.9
16.0II	46	32	9	52	4.5	47	9.6
16.5III	50	34	5	49	4.0	39.2	10.2
8.0I	47	34	26	50	4.8	47	10.2
8.0II	49	34	57	50	4.8	47	10.2

STAT

E	R	I	DIS
$P_L = 300$	$R_s = 300 \Omega$	30 MA	9.0 W
$P_A SG = 112.55 V$	47K 220	7.2 MA	1.835 W
OSC $P_L = 200 V$	47K 200	5.5 MA	1.10 W
OSC $SG = 950 V$	47K 110	2.23 MA	3.34 W

$R_g PA = 27K \text{ OHMS}$ (VALUES OF POWER OUTPUT SLIGHTLY HIGHER WITH LOWER R_g VALUE) BUT ACCOMPANIED WITH INCREASED I_p ON DETUNE)
 $R_k PA = 200 \text{ OHMS}$


5763 PA RS-6. XMITR. EXP. H₁₀₀ TAPCO P₁₀₀ 3-12-52
 EP = 800 ESH = 240V GANOSC EP = 300 E₅₉ = 95V

f	I _{TOTAL}	I _P	E _g	E _a	P _o	EFF	P _i
3.0 I	77	46	30+	76	9.63	69.5	13.8
6.0 I	72	46	30+	78	10.1	73.2	13.8
6.0 II	72	44	30+	79	10.4	78.0	13.2
7.0 I	73	47	30+	80	10.65	75.6	14.1
7.0 I	100	68	10	80	10.65	52.25	20.4
8.0 I	102	68	10	82	11.2	55.0	20.4
8.0 II	97	63	7	78	10.1	53.5	18.9
9.0 I	95	64	7	80	10.65	55.5	19.2
9.0 II	96 (10)	64 (59)	8 (10)	81 (79)	10.9	56.8	19.2
9.0 III	88	65	4.5	79	8.65V	44.4	19.5
11.0 II	95	61	7	87	10.9	59.7	18.3
11.0 II	94 (10)	60 (57)	6.5 (10)	80	10.65	59.25	18.0
16.0 II	92	57 (51)	5 (10)	78	10.1	59.1	17.1
16.5 III	82	48 (46)	3 (6)	69	7.85V	53.75	14.4
30							
12							

150

I_{PA} = 4.5 MA
 I_{59 PA} = 7.9 MA R = 4700 1.895 W
 I_{P OSC} = 0.13.3 MA 4.0 W
 I_{59 OSC} = 4.8 MA R = 30K .455 W
 STAT

NOTE: P_g P.A. CHANGED FROM 17000Ω AT L.B. SETTINGS TO 1200Ω AT M.B. & H.B. SETTINGS.

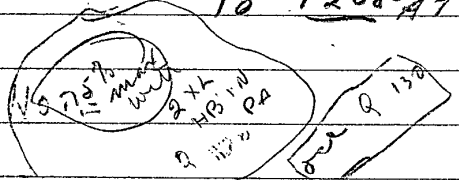

5763 PA
 BP=300 ESG=240 RS-6. EXP. MODEL 3-19-52
 6ANSOSC EP=300 ESG=75

f	I _{TOP}	I _P	E _g	E _a	P _o	E _{eff}	P _i
5 I							
6 I							
6 II							
7 I	93	63	10	78	10.1	53.5	18.9
7 III	80	48	11	66	17.75	50.4	14.4
8 I	92	61	19	78	10.1	55.4	18.3
8 II *	89	59	10	76	9.65	54.5	17.7
9 I	90	60	11	79	9.65	53.6	18.0
9 II	89	59	10.4	78	9.65	54.5	17.7
9 III	80	48	8	68	7.6	52.75	14.4
11 II	90	60	13	80	10.65	59.3	18.0
16 II *	85	54	12	76	9.65	59.5	16.2
16 III	81	49.5	7.5	72	8.65	58.2	14.85
7 III	80	48	11	66	7.75		
8 III							

** WEAK SIGNAL

* DOES NOT QUITE AT RESONANCE

STAT

ABOVE READINGS TAKEN WITH TOROID HB OSC
 COIL RANGE 7-16.5 MC. 2.6 MH. Q=130

(75% MAX EFF OBTAINED WHEN L = 2 X 2.6 MH
 AT 16 MC) MINIMAX COIL USE Q 7200

A MINIMAX OF 7200 WAS SUBSTITUTED
 FOR HIGH BAND FINAL TANK; NO IMPROVEMENT
 IN OUT NOTICABLE

OSC GANS RS-6 TRANSMITTER (EXP) 3-13-52
 EP=300 ESQ 95 OSC. OUTPUT VOLTAGE AC MINT Q7200

f	I _p	I _{sq}	E _r	P _o	E _{ff}	*E _r
3.0 I	10.5	4.0	3.9	✓		7.0
6.0 II	15.0		3.05	0		5.25
6.0 III	11.5		3.6	✓		6.5
7.0 I	9.5		4.3	✓		9.0
7.0 II	11.0		3.4	✓		7.0
8.0 I	11.25		3.6	✓		7.0
8.0 II	16.0		2.5	0		5.25
9.0 I	12.0		3.4	✓		5.5
9.0 II	12.35		3.4	0		5.5
9.0 III	17.5		1.2	Z high Q medium		2.15
11.0 II	14.5		3.1	0		4.75
11.0 III	15.5		2.3	0 Low Z		4.1
16.0 II	16.5		2.2	0 Low Q		3.1
16.0 III	17.5		1.1	Z high lowest Q		1.95
12.0 II	14.5		2.55	0		4.2
14.0 II	15.0		2.45	0		3.9
12 III	17.5		POOR ROCK	Z Low & low Q		1.6
6.0 III	16.0		2.3	Z high & highest Q		4.75
4.0 II	11.5		4.0			7.5

OR 2.3V to 1.3V
 Diff of Q 170 to 110A gives diff of output from 10.1 to 7.85 or 2.25 WATTS

STAT

* SAME EXCEPT WITH TOROID COIL IN HB RANGES - IS 7-16.5

3-13-52

L = 16.6 μ h.

L = 6.6 μ h.

L = 3.075

Q = 155 @ 3.0

Q = 130 @ 9.0

Q = 122 @ 11

Q = 170 @ 6.85

Q = 125 @ 11

Q = 110 @ 15.75

Q = 162 AVG

Q = 127 AVG

Q = 116 AVG

f	X
3.0	31300
4.0	417
5.0	521
6.0	626
7.0	67250

f	X
7	290
8	332
9	373
10	415
11	456

f	X
11	212
12	232
13	251
14	270
15	290
16.5	318

f	Z
3.0	50600
4.0	67500
5.0	84500
6.0	101500
7.0	109000 ✓

f	Z
7.5	36100
8.0	42100
9.0 ✓	47400
10.0	52600
11.0	58000 ✓


f	Z
11	24600
12	26900
13	29100
14	31300
15	34500
16.5	36900 ✓

1890 36
144

Lo USING Q OSC COIL (2 TAP)

6 AWG OSC

STAT



3-10-52

2E26 RS-6 TRANSMITTER - EXP. MODEL TAPPED TANK

PA: $E_p = 400V$ $E_{sq} = 220V$

6BC5 OSC: $E_p = 190$ $E_{sq} = 150$

f	I_{total}	I_p	E_g	E_a	P_o	Eff	P_i
3.0 I	71	58	25	94	14.7	63.5	23.2
6.0 I	74	61	24	96	15.3	63.0	24.4
6.0 II	72	59	24	96	15.3	65.0	29.6
7.0 I	75	62	30+	102	17.38	70.0	24.8
7.0 I:	76	62.5	22	82	11.2	44.8	25.0
9.0 I.	76	63.5	23.5	88	12.8	50.5	25.4
9.0 II	77	64	18.5	86	12.35	48.2	25.6
9.0 III	80	66	5.5	80	10.67 ✓	40.5	26.4
11.0 II	76	62	16.5	88	12.8	51.75	24.8
11.0 II:	76	62	10-	86	12.35	50.0	24.8
16.5 III	77	64	6	85	12.0	47.0	25.6
16.5 III	80	66	1	77	9.9 ✓	37.5	26.4

32W

↑
DON'T QUITE TUNE UP

OSC $I_{sq} = 2.1 MA$

Sq DISS = 3.15 W RATED 0.5 W

OSC $I_p = 16.35 MA$

P_L DISS = 1.14 W RATED 2.0 W

PA $Sq = 6.9 MA$

Sq DISS = 1.52 W


STAT

OSC $P_{RES} = 33 IC$


OSC $Sq_{RES} = 33 IC$

PA $Sq_{RES} = 20 IC$

3-4-52

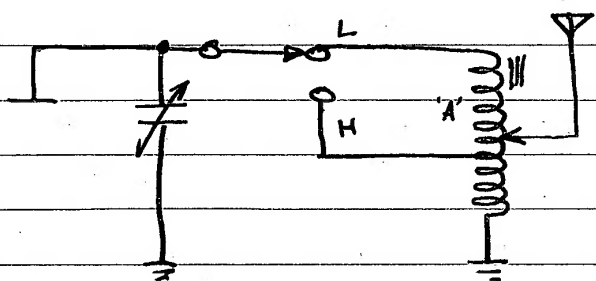

METHOD 1

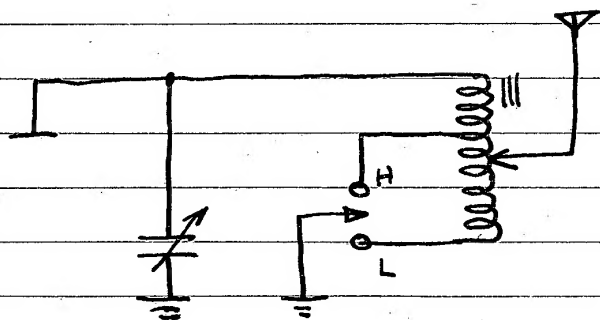


METHOD 2

METHOD 1 TRIED FIRST WITH POOR RESULTS DUE TO EXCESSIVE MINIMUM CAPACITY IN HIGH BAND POSITION; IE, HIGH END OF BAND LIMIT CANNOT BE REACHED ENDING ABOUT 15.75 INSTEAD OF 16.5 MC. LOW END OF HIGH BAND IS JUST POSSIBLE WITH MAXIMUM CAPACITY, IE, 7 MC.

IT IS BELIEVED THAT SOME PERCENTAGE OF MINIMUM CAPACITY IS DUE TO THIS METHOD OF TAPPING AND SWITCHING, PLUS LOSS DUE TO COIL BEING AT PLATE END OF COIL IN HIGH BAND POSITION.

STAT

METHOD 2 INSTALLED WITH GOOD RESULTS INDICATING REDUCTION OF MINIMUM CAPACITY ON HIGH BAND.

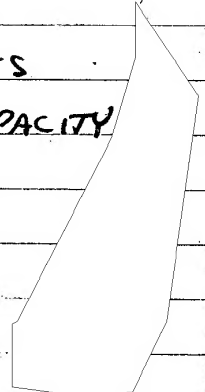

RT-6

2-28-52

PA TANK (TAPPED COIL TYPE)

AFTER ASSEMBLY OF HARDWARE ETC.

FULL TURNS = 13.8 mh	Q = 145 @ 2.5
TAP = 2.16 mh	Q = 115 @ 2.9

3.0 mc	Q = 160	C = 205 MAX
7.0 mc	Q = 170	C = 35 MIN

7.6 mc	Q = 110	C = 205
16.25	Q = 100	C = 35

Q'S UNSTABLE

TOTAL TURNS = 32
TAP = 9


AFTER REMOVING METAL BOTTOM PLATE AND INSTALLING PLASTIC.

FULL TURNS = 13.8 mh	Q = 170 @ 2.5
TAP = 2.2 mh	Q = 120 @ 2.9

3.0 mc	Q = 185	C = 205
7.0 mc	Q = 200	C = 35

7.5 mc	Q = 120	C = 205
16.5	Q = 120	C = 35

APPROVE PRIOR TO INSTALLATION IN CHASSIS OF RS-6

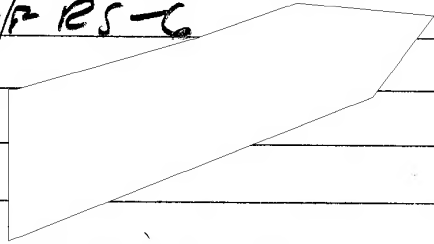

STAT

2-25-52

RS-6 PA. TANK

TAPPED COIL -

FULL TURNS 2 / 3.85 mh Q = 180 @ 2.5

TAP = 2/2 mh. Q = 140 AT 7.9 mc

3.0 mc Q = 200 C = (205 ^{total} ~~max~~)

7.0 mc Q = 213 C = 35 ~~mf.~~

TAPPED

7.0 mc Q 132 C = (237) - (92) ^{total}

17.25 Q 122 C = 35

5 MAXIMUM


TOTAL TURNS = 22

TAP FROM GND END: 9

POSSIBILITY REQUIRE 10 TURNS ON TAP.

WITH PLUGS

SEE 2-28-52

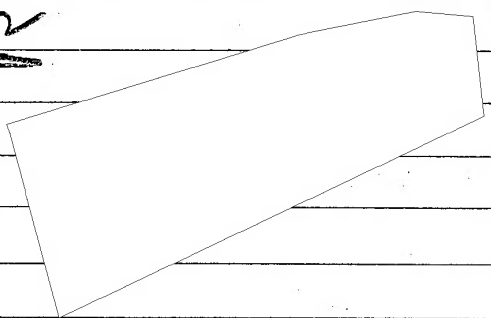

STAT.

SINGLE TAPPED PLATE TANK 2-20-52
RS-6 TRANSMITTER

L = 8 mh. (LESS SLUGS) Q = 250
L = 14 mh. (3 SLUGS-GS) Q = 212

C @ 3.0 mc = 166 (20% MAX) Q = 222
C @ 7.0 mc = 34 Q = 242

TOTAL TURNS = 32
PITCH = 20 / IN

TAP 43 = 9 TURNS FROM GND Q = 115
C = 166 @ 7.0 mc Q = 165
C = 34 @ 16.0 mc Q = 135

SEE 2-25-52 FOR
ACTUAL READINGS AFTER CONSTRUCTION
OF COIL WITH COLLECTION PINS
INSTALLED.

